

Applications of Context Free Grammars

CS351
Introduction to XML

Example 1: Parsing Programming Languages

- Consider an arbitrary expression
 - Arbitrary nesting of operators
 - Parenthesis balancing
 - Requires CFG
- YACC – Yet Another Compiler Compiler
 - Unix program often used to generate a parser for a compiler
 - Output is code that implements an automaton capable of parsing the defined grammar
 - Also mechanisms to perform error handling, recovery

YACC

- Definitions
 - Variables, types, terminals, non-terminals
- Grammar Productions
 - Production rules
 - Semantic actions corresponding to rules
- Typically used with lex
 - Lexical rules $\rightarrow$ lex $\rightarrow$ C program with yylex()
 - yylex processes tokens
 - Grammar rules, yylex $\rightarrow$ yacc $\rightarrow$ C program with yyparse()
 - yyparse processes grammar of tokens

YACC Example Productions

Exp	:	ID	{...}	{...} contains semantic actions.
		Exp '+' Exp	{...}	
		Exp '*' Exp	{...}	
		(' Exp ')	{...}	
;				
Id	:	'a'	{...}	Grammar matches: $E \rightarrow ID \mid E+E \mid E * E \mid (E)$ $ID \rightarrow a \mid b \mid ID\ a \mid ID\ b \mid$ $ID\ 0 \mid ID\ 1$
		'b'	{...}	
		Id 'a'	{...}	
		Id 'b'	{...}	
		Id '0'	{...}	
		Id '1'	{...}	
;				

Example YACC Semantics

- | Exp '+' Exp { \$\$ = \$1 + \$2 }
- | Exp '*' Exp { \$\$ = \$1 * \$2 }

Example 2: XML - What is it?

- XML = eXtensible Markup Language
- Relatively new technology for web applications - 1997
- World Wide Web Consortium (W3C) standard that lets you create your own tags.
 - Implications for business-to-business transactions on the web.

HTML and XML

```
<p><b>Mrs. Mary McGoon</b>
<br>
1401 Main Street
<br>
Anytown, NC 34829</p>
```

- Why do we need XML? We have HTML today
- All browsers read HTML
- Designed for reading by Humans
- Example on the left

HTML Rendered

```
<p><b>Mrs. Mary McGoon</b>
<br>
1401 Main Street
<br>
Anytown, NC 34829</p>
```

Mrs. Mary McGoon
1401 Main Street
Anytown, NC 34829

- HTML “rendered” as shown to the left
- Tags describe how the HTML should be displayed, or presented
- Tags don’t describe what anything is!

Sample XML File

```
<address>
<name>
<title>Mrs.</title>
<first-name>Mary</first-name>
<last-name>McGoon</last-name>
</name>
<street>1401 Main Street</street>
<city>Anytown</city>
<state>NC</state>
<zipcode>34829</zipcode>
...
</address>
```

- Same data, but in an XML format
- Humans, but particularly computers, can understand the meaning of the tags
- If we want to know the last name, we know exactly where to look!


Displaying XML

```
<address>
<name>
<title>Mrs.</title>
<first-name>Mary</first-name>
<last-name>McGoon</last-name>
</name>
<street>1401 Main Street</street>
<city>Anytown</city>
<state>NC</state>
<zipcode>34829</zipcode>
...
</address>

Mrs. Mary McGoon
1401 Main Street
Anytown, NC 34829
```

- XML can be rendered, or displayed, just like the HTML page if we so desire
- Rendering instructions aren't stored in the same file, but in a separate XSL file - exTensible Stylesheet Language

Second Rendering

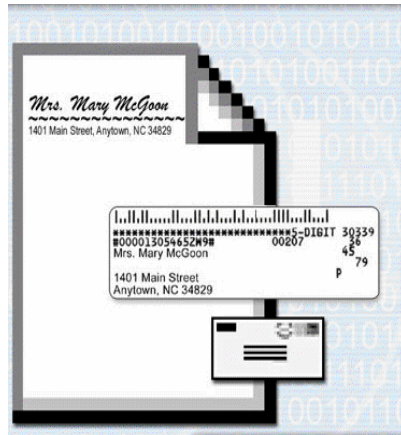

- With a different style sheet, we can render the data in an entirely different way
- Same content, just different presentation

Second example: Song Lyrics in HTML

```
<H1>Hot Cop</H1>
< i> by Jacques Morali, Henri Belolo, and Victor Willis</i>
<ul>
  <li>Producer: Jacques Morali
  <li>Publisher: PolyGram Records
  <li>Length: 6:20
  <li>Written: 1978
  <li>Artist: Village People
</ul>
```

Song Lyrics in XML

```
<SONG>
  <TITLE>Hot Cop</TITLE>
  <COMPOSER>Jacques Morali</COMPOSER>
  <COMPOSER>Henri Belolo</COMPOSER>
  <COMPOSER>Victor Willis</COMPOSER>
  <PRODUCER>Jacques Morali</PRODUCER>
  <PUBLISHER>PolyGram Records</PUBLISHER>
  <LENGTH>6:20</LENGTH>
  <YEAR>1978</YEAR>
  <ARTIST>Village People</ARTIST>
</SONG>
```

Song XSL Style Sheet for Formatting

```
<?xml version="1.0"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/TR/WD-xsl">
  <xsl:template match="/">
    <html> <head><title>Song</title></head>
    <body><xsl:value-of select="."/></body>
  </html>
</xsl:template>
<xsl:template match="TITLE">
  <h1><xsl:value-of select="."/></h1>
</xsl:template>
</xsl:stylesheet>
```


Style Sheets can be quite complex; most translate to HTML

Third Example - News Story

- News article in XML format using the “News” DTD (Document Type Definition)

```
<?xmlversion="1.0"?>
<!DOCTYPE NewsArticle SYSTEM "News.dtd">
<NewsArticle>
  <Head>
    <Title>IBM Releases Open Software to Improve
    Security, Performance, and Reliability of
    Internet E-Mail Systems</Title>
    <Date>12/14/98</Date>
    <Summary>IBM is making available through
    alphaWorks free open source software
    designed to improve the security,
    reliability and performance of
    e-mail delivery services.</Summary>
    <Category topic="Corporate And Financial"/>
    ...
  </NewsArticle>
```

Different Display using Different Style Sheets for Different Apps

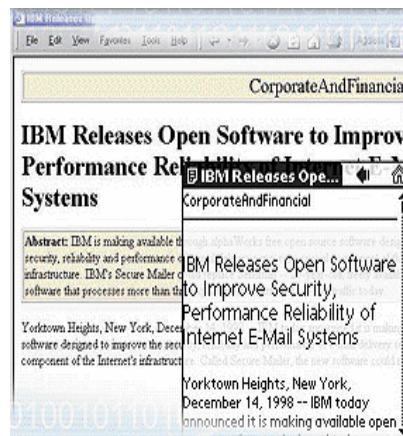


- Desktop rendering using IE
- Palmtop rendering
- Different output needed using different devices, but the same underlying content

Example Applications

- Web Pages
 - XHTML is XML with an HTML DTD
- Mathematical Equations
- Music Notation
- Vector Graphics
- Metadata

Mathematical Markup Language

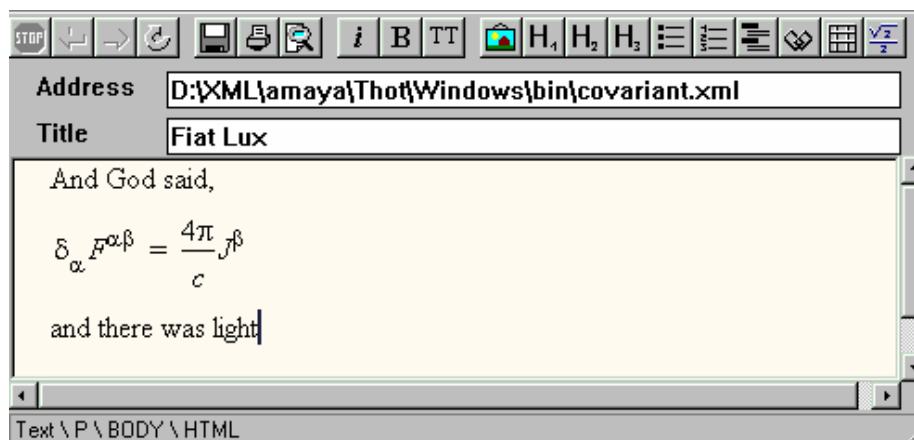

Vector Graphics

- Vector Markup Language (VML)
 - Internet Explorer 5.0
 - Microsoft Office 2000
- Scalable Vector Graphics (SVG)

File Formats, In-House, Other

- Microsoft Office 2000
- Federal Express Web API
- Netscape What's Related

Summary of XML Benefits

- Can now send structured data across the web
 - Semantics and Syntax (Presentation), separated
- Business to Business Transactions
 - Using a published XML format (DTD), we can specify orders, items, requests, and pretty much anything we want and display them using any XSL
 - Intelligent Agents can now understand what data means, instead of complex algorithms and heuristics to guess what the data means
 - e.g. Shopping Agents
- Smart Searches using XML queries, not keywords

Where do the XML Tags Come From?

- You get to invent the tags!
- Tags get defined in the DTD (Data Type Definition)
- HTML has fixed tags and presentation meaning only
- XML has user-defined tags and semantic meaning separated from presentation meaning

HTML is a fixed standard. XML lets everyone define the data structures they need.

DTD - Defining Tags

- A **D**ocument **T**ype **D**efinition describes the elements and attributes that may appear in a document
- a list of the elements, tags, attributes, and entities contained in a document, and their relationship to each other - consider it to be a template
- XML documents must be **validated** to ensure they conform to the DTD specs
 - Ensures that data is correct before feeding it into a program
 - Ensure that a format is followed
 - Establish what must be supported
 - E.g., HTML allows non-matching <p> tags, but this would be an error in XML

Sample DTD and XML

greeting.xml

```
<?xml version="1.0"?>
<?xml-stylesheet type="text/xsl" href="greeting.xsl"?>
<!DOCTYPE GREETING SYSTEM "greeting.dtd">
<GREETING>
Hello World!
</GREETING>
```

greeting.dtd


```
<!ELEMENT GREETING (#PCDATA)>
```

Greeting XSL

greeting.xsl

```
<?xml version="1.0"?>
<!--XSLT 1.0 -->
<xsl:transform
xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
version="1.0">
<xsl:output method="xml" omit-xml-declaration="yes"/>
<xsl:template match="/">
<H2><xsl:value-of select="greeting"/></H2>
</xsl:template>
</xsl:transform>
```

Family Tree - Derived from SGML (Standard Gen. Markup Lang)

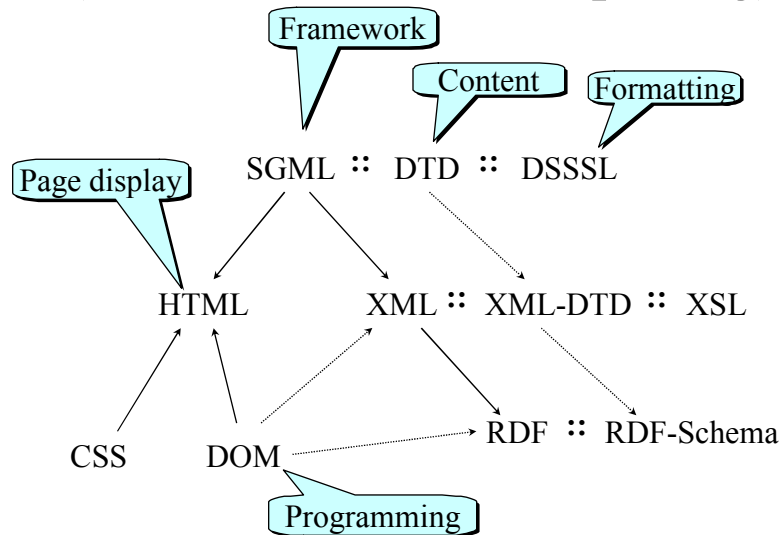

XML Usage Today

Text Encoding Initiative (TEI)	Digital Receipt Infrastructure Initiative
Channel Definition Format, CDF (Based on XML)	Digest Values for DOM (DOMHASH)
W3C Document Object Model (DOM), Level 1 Specification	Signed Document Markup Language (SDML)
Web Collections using XML	FIXML - A Markup Language for the FIX Application Message Layer
Meta Content Framework Using XML (MCF)	Bank Internet Payment System (BIPS)
XML-Data	OpenMLS - Real Estate DTD Design
Namespaces in XML	Customer Support Consortium
Resource Description Framework (RDF)	XML for the Automotive Industry - SAE J2008
The Australia New Zealand Land Information Council (ANZLIC) - Metadata	X-ACT - XML Active Content Technologies Council
Alexandria Digital Library Project	Mathematical Markup Language
XML Metadata Interchange Format (XMI) - Object Management Group (OMG)	OpenTag Markup
Educom Instructional Management Systems Project	Metadata - PICS
Structured Graph Format (SGF)	CDIF XML-Based Transfer Format
Legal XML Working Group	Synchronized Multimedia Integration Language (SMIL)
Web Standards Project (WSP)	Precision Graphics Markup Language (PGML)
HTML Threading - Use of HTML in Email	Vector Markup Language (VML)
XLF (Extensible Log Format) Initiative	WebBroker: Distributed Object Communication on the Web
WAP Wireless Markup Language Specification	Web Interface Definition Language (WIDL)
HTTP Distribution and Replication Protocol (DRP)	XML/EDI - Electronic Data Interchange
Chemical Markup Language	XML/EDI Repository Working Group
Bioinformatic Sequence Markup Language (BSML)	European XML/EDI Pilot Project
BIOPolymer Markup Language (BIOML)	EEMA EDI/EC Work Group - XML/EDI
Virtual Hyperglossary (VHG)	DISA, ANSI ASC X12/XML
Weather Observation Definition Format (OMF)	Information and Content Exchange (ICE)
Open Financial Exchange (OFX/OFE)	CommerceNet Industry Initiative
Open Trading Protocol (OTP)	eCo Framework Project and Working Group
Signed XML (W3C)	vCard Electronic Business Card
	iCalendar XML DTD

More XML Usage

Telecommunications Interchange Markup (TIM, TCIF/IPI)	SpeechML
Encoded Archival Description (EAD)	XML and VRML (Virtual Reality Modeling Language)
UML eXchange Format (UXF)	XML for Workflow Management [NIST]
Translation Memory eXchange (TMX)	SWAP - Simple Workflow Access Protocol
<i>Scripting News</i> in XML	Theological Markup Language (ThML)
Coins: Tightly Coupled JavaBeans and XML Elements	XML-F ('XML for FAX')
DMTF Common Information Model (CIM)	Extensible Forms Description Language (XFDL)
Process Interchange Format XML (PIF-XML)	Broadcast Hypertext Markup Language (BHTML)
Ontology and Conceptual Knowledge Markup Languages	IEEE LTSC XML Ad Hoc Group
Astronomical Markup Language	Open Settlement Protocol (OSP) - ETSI/TIPHON
Astronomical Instrument Markup Language (AIML)	WDDX - Web Distributed Data Exchange
GedML: [GEDCOM] Genealogical Data in XML	Common Business Library (CBL)
Newspaper Association of America (NAA) - Standard for Classified Advertising Data	Open Applications Group - OAGIS
News Industry Text Format (NITF)	Schema for Object-oriented XML (SOX)
Java Help API	XMLTP.Org - XML Transfer Protocol
Cold Fusion Markup Language (CFML)	The XML Bookmark Exchange Language (XBEL)
Document Content Description for XML (DCD)	Simple Object Definition Language (SODL) and XMOP Service
XSchema	XML-HR Initiative - Human Resources
Document Definition Markup Language (DDML)	ECMDData - Electronic Component Manufacturer Data Sheet Inventory Specification
WEBDAV (IETF 'Extensions for Distributed Authoring and Versioning on the World Wide Web')	Bean Markup Language (BML)
Tutorial Markup Language (TML)	Chinese XML Now!
Development Markup Language (DML)	MOS-X (Media Object Server - XML)
VXML Forum (Voice Extensible Markup Language Forum)	FLBC (Formal Language for Business Communication) and KQML
VoxML Markup Language	ISO 12083 XML DTDs
SABLE: A Standard for Text-to-Speech Synthesis Markup	Extensible User Interface Language (XUL)
Java Speech Markup Language (JSML)	Commerce XML (cXML)
	Process Specification Language (PSL) and XML
	XML DTD for Phone Books
	Using XML for RFCs
	Schools Interoperability Framework (SIF)

Major Companies Backing XML

- XML has support from many major players in the industry
 - Sun, Microsoft, IBM, Oracle
 - W3C

Microsoft on XML

- Office 2000 uses XML backend
 - Supports publishing to web, retain all formatting
- Internet Explorer 5+ supports XML parser
- Exchange 2000 supports XML
 - Supports both XML and HTML so that application developers can build on a set of core services to speed development of applications such as document management solutions
- Core technology of .NET

XML Query Language

- Several proposals for query language
- Modeling after existing OODB QLs
 - inline construction of XML from XML

```
WHERE <book>
  <publisher><name>Addison-Wesley</></>
  <title> $t</>
  <author> $a</>
</> IN "www.a.b.c/bib.xml"
CONSTRUCT <result>
  <author> $a</>
  <title> $t</>
</>
```

- APIs for script usage

Programming XML

- XML defines an object/attribute data model
- DOM (Document Object Model) is the API for programs to act upon object/attribute data models
 - DHTML is DOM for HTML
 - interface for operating on the document as paragraphs, images, links, etc
 - DOM-XML is DOM for XML
 - interface for operating on the “document” as objects and parameters
- Microsoft supports DHTML, exposes HTML objects as DOM

Style Sheets / DTD / XML

- The actual XML, Style Sheets, and the DTD (Document Type Definition) could be made by hand, but more typically are created with the help of XML Tools
 - Many tools on the market
 - IBM alphaworks
 - Vervet’s XML Pro
 - Microfar Designer

Lots of people using it...but

- Everyone is using it for their own individual purposes! Many sharing/inventing DTD's with their partners/customers, not being adopted by others.
- Downside: Web full of gobbledygook that only a select few understand
- Even though your browser may parse XML, it may not understand what it really means
- Effect: Everyone can invent their own language on the web
 - Tower of Babel on the web, or Balkanization

Quick Quiz

- What's a DTD?
- Difference between XML and HTML?
- What's a eXtended Style Sheet?
- How can XML make searching easier?

Summary

- XML specifies semantics, not just presentation
 - Semantics separate from Presentation language
 - Users can define their own tags/languages
- Greatly simplifies machine understanding of data
 - Agents easier to implement
 - Business to business transactions
- International, standard format to share and exchange knowledge

Back to Context-Free Grammars...

- HTML can be described by classes of text
 - *Text* is any string of characters literally interpreted (i.e. there are no tags, user-text)
 - *Char* is any single character legal in HTML tags
 - *Element* is
 - Text or
 - A pair of matching tags and the document between them, or
 - Unmatched tag followed by a document
 - *Doc* is sequences of elements
 - *ListItem* is the tag followed by a document
 - *List* is a sequence of zero or more list items

HTML Grammar

- Char $\rightarrow$ a | A | ...
- Text $\rightarrow$ ε | Char Text
- Doc $\rightarrow$ ε | Element Doc
- Element $\rightarrow$ Text | Doc | <P> Doc | List
- ListItem $\rightarrow$ Doc
- List $\rightarrow$ ε | ListItem List

XML's DTD

- The DTD lets us define our own grammar
- Context-free grammar notation, also using regular expressions
- Form of DTD:
 <!DOCTYPE name-of-DTD [
 list of element definitions
]>
- Element definition:
 – <!ELEMENT element-name (description of element)>

Element Description

- Element descriptions are regular expressions
- Basis
 - Other element names
 - #PCDATA, standing for any TEXT
- Operators
 - | for union
 - , for concatenation
 - * for Star
 - ? for zero or one occurrence of
 - + for one or more occurrences of

PC Specs DTD

```
<!DOCTYPE PcSpecs [  
  <!ELEMENT PCS (PC*)>  
  <!ELEMENT PC (MODEL, PRICE, PROC, RAM, DISK+)>  
  <!ELEMENT MODEL (#PCDATA)>  
  <!ELEMENT PRICE (#PCDATA)>  
  <!ELEMENT PROC (MANF, MODEL, SPEED)>  
  <!ELEMENT MANF (#PCDATA)>  
  <!ELEMENT SPEED (#PCDATA)>  
  <!ELEMENT RAM (#PCDATA)>  
  <!ELEMENT DISK (HARDDISK | CD | DVD )>  
  <!ELEMENT HARDDISK (MANF, MODEL, SIZE)>  
  <!ELEMENT SIZE (#PCDATA)>  
  <!ELEMENT CD (SPEED)>  
  <!ELEMENT DVD (SPEED)>  
]>
```

Pc Specs XML Document

```
<PCS>
<PC>
  <MODEL>4560</MODEL>
  <PRICE>$2295</PRICE>
  <PROCESSOR>
    <MANF>Intel</MANF>
    <MODEL>Pentium</MODEL>
    <SPEED>1Ghz</SPEED>
  </PROCESSOR>
  <RAM>256</RAM>
  <DISK>
    <HARDDISK>
      <MANF>Maxtor</MANF>
      <MODEL>Diamond</MODEL>
      <SIZE>30Gb</SIZE>
    </HARDDISK>
  </DISK>
  <DISK><CD><SPEED>32x</SPEED></CD></DISK>
</PC>
<PC> ..... </PC>
</PCS>
```

Examples with Style Sheet

- Hello world with Greeting DTD
- Product / Inventory List

Prod.XML

```
<?xml version="1.0"?><!--prod.xml-->
<?xml-stylesheet type="text/xsl" href="prodlst.xsl"?>
<!DOCTYPE sales [
<!ELEMENT sales ( products, record )>          <!--sales information-->
<!ELEMENT products ( product+ )>              <!--product record-->
<!ELEMENT product ( #PCDATA )>                <!--product information-->
<!ATTLIST product id ID #REQUIRED>
<!ELEMENT record ( cust+ )>                    <!--sales record-->
<!ELEMENT cust ( prodsale+ )>                  <!--customer sales record-->
<!ATTLIST cust num CDATA #REQUIRED>           <!--customer number-->
<!ELEMENT prodsale ( #PCDATA )>               <!--product sale record-->
<!ATTLIST prodsale idref IDREF #REQUIRED>
]>
<sales>
  <products><product id="p1">Packing Boxes</product>
    <product id="p2">Packing Tape</product></products>
  <record><cust num="C1001">
    <prodsale idref="p1">100</prodsale>
    <prodsale idref="p2">200</prodsale></cust>
    <cust num="C1002">
    <prodsale idref="p2">50</prodsale></cust>
    <cust num="C1003">
    <prodsale idref="p1">75</prodsale>
    <prodsale idref="p2">15</prodsale></cust></record>
</sales>
```

ProdLst.XSL

```
<?xml version="1.0"?><!--prodlst.xsl-->
<!--XSLT 1.0 -->
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  version="1.0">

<xsl:template match="/">          <!--root rule-->
  <html><head><title>Record of Sales</title></head>
  <body><h2>Record of Sales</h2>
    <xsl:apply-templates select="/sales/record"/>
  </body></html></xsl:template>
<xsl:template match="record">      <!--processing for each record-->
  <ul><xsl:apply-templates/></ul></xsl:template>
<xsl:template match="prodsale">    <!--processing for each sale-->
  <li><xsl:value-of select="../@num"/> <!--use parent's attr-->
    <xsl:text> - </xsl:text>
    <xsl:value-of select="id(@idref)"/> <!--go indirect-->
    <xsl:text> - </xsl:text>
    <xsl:value-of select="."/;></li></xsl:template>
</xsl:stylesheet>
```

ProdTbl.xsl

```
<?xml version="1.0"?><!--prodtbl.xsl-->
<!--XSLT 1.0 -->
<html xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
      xsl:version="1.0">
  <head><title>Product Sales Summary</title></head>
  <body><h2>Product Sales Summary</h2>
  <table summary="Product Sales Summary" border="1">
    <!--list products-->
    <th align="center">
      <xsl:for-each select="//product">
        <td><b><xsl:value-of select="."/></b></td>
      </xsl:for-each></th>

      <!--list customers-->
      <xsl:for-each select="/sales/record/cust">
        <xsl:variable name="customer" select="."/>
        <tr align="right"><td><xsl:value-of select="@num"/></td>
        <xsl:for-each select="//product"> <!--each product-->
          <td><xsl:value-of select="$customer/prodsale
            [@idref=current()/@id]"/>
          </td></xsl:for-each>
        </tr></xsl:for-each>

        <!--summarize-->
        <tr align="right"><td><b>Totals:</b></td>
        <xsl:for-each select="//product">
          <xsl:variable name="pid" select="@id"/>
          <td><!--xsl:value-of
            select="sum(/prodsale[@idref=$pid])"/></td>
          </td></xsl:for-each></tr>
      </table>
</body></html>
```

Product Rendering Results

Product Sales Summary

	Packing Boxes	Packing Tape
C1001	100	200
C1002		50
C1003	75	15
Totals:	175	265

Record of Sales

- C1001 - Packing Boxes - 100
- C1001 - Packing Tape - 200
- C1002 - Packing Tape - 50
- C1003 - Packing Boxes - 75
- C1003 - Packing Tape - 15